



H 66024 Difuplan SK 38


Product	Increased vapour permeable synthetic underlay, particular surface water-proof, for direct application on thermal insulation or boarding, with two self-adhesive stripes - the proven standard-underlay. For rain-proof under-roof constructions acc. ÖNORM B 4119. Vapour permeable special film between extremely robust PP-fabrics.
Intended use	<ul style="list-style-type: none"> • Underlay for discontinuous roofing • Underlay for discontinuous roofing
Standard	EN 13859-1
Application	Invisible mechanical fixing Side laps: Bonding by the integrated adhesive stripe End laps: Use the Isola Modified Bitumen Adhesive inside the laps, Difuplan EKB A 60 on the overlaps
Benefits	<ul style="list-style-type: none"> • easy application due to 2 integrated adhesive stripes • good UV and temperature stability • non-reflective • anti-slippery • water- and driving rain-proof • wind-proof • full recyclable and PVC-free
Packaging	20 rolls of 50 m x 1,5 m = 1500 m ² /pallet

Characteristics	Testing method	Unit	Result
Length		m	50
Width		m	1,5
Mass per unit area		g/m ²	170 (±10)
Composition		Material	PP : PP : PP
Fire classification	EN 13501-1	Class	E
Resistance to water penetration		Class	W1
Artificial aging - resistance to water penetration		Class	W1
sd-value		m	0,02 (+0,07 / -0,01)
Tensile force long./trans.		N/50mm	350 / 230 (±40)
Artificial aging - Tensile force long./trans.		N/50mm	300 / 180 (±30)
Elongation (long./trans.)		%	70 / 100 (±20)
Artificial aging - Elongation (long./trans.)		%	≥ 65 / ≥ 65
Resistance to tearing (long./trans.)		N	210 / 290 (±30)
Flexibility at low temperatures		°C	-40
Thermal resistance		°C	bis +100
UV-resistance		Monate	3
Number of self-adhesive stripes		Stk.	2

**) acc. ÖNORM B 4119

Thermal insulation between rafters (example)

Construction (top down)

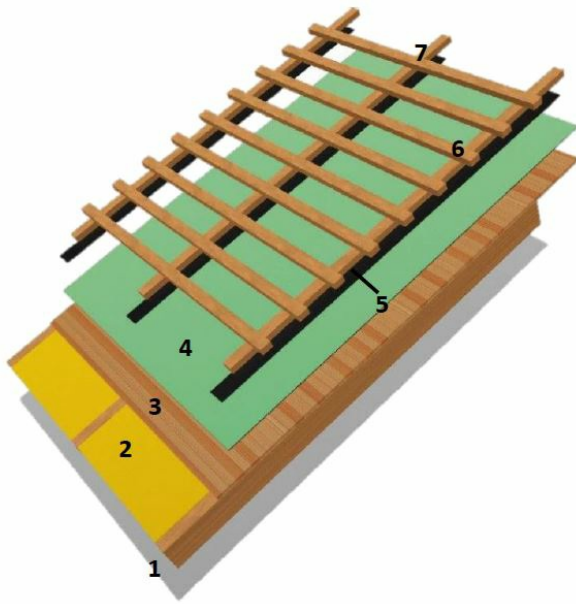

System components

- H81009 Isola Polymerbitumenkaltkleber
- H66321 Difuplan EKB A60
- H66322 Difutex EKB I60
- H66050 Difuplan DKB
- H66xxx Nageldichtbänder



Polymerbitumenkaltkleber



EKB A60



EKB I60



DKB



Nageldichtbänder

The declared data are indices based on the statistical quality control and refer to the date of production. Consider state of the art, standards, legal provisions and guidelines for the suitability of the mentioned field of application and application method. All specifications are without obligation. The user must assess the suitability of the product for the particular purpose and ensure the user's access to the current version of the product data sheet.

Subject to alteration without notice.

Storage conditions: The products have to be stored in original packaging, being protected from direct sun light, UV-beams and extreme conditions like heat, frost, moisture, etc. During cold season store the products in a frost-free area (+5°C) for 12 hours before application.

Development, Production and Sales of our products according to ISO 9001.